



SHELTER STRUCTURES

PRODUCT SPECIFICATIONS

SHELTER A-FRAME M-SERIES

TENT SPECIFICATIONS

Model	M30
Span Width	30m
Eave Height	4.00m
Ridge Height	9.00m
Bay Distance	5m
Roof Pitch	18°
Longest Component	10.70m
Maximum Length	Unlimited in 5 meter increments
Max. WindLoad	115mph

FRAMEWORK

Main Profiles	250*120 *4mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

COVER

Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

M-SERIES DRAWING


Rendering



Gable Drawing

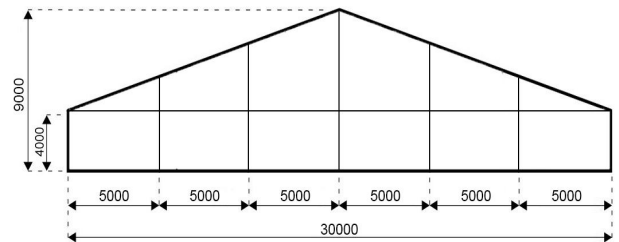

Frame Drawing

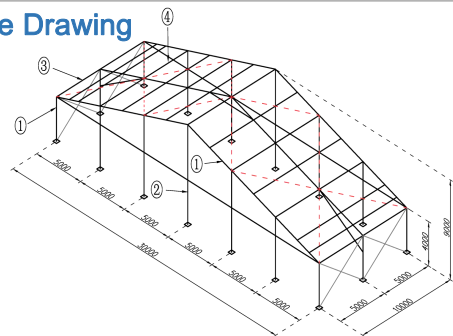

Profile Specifications

Upright Support Roof Beam ①	Gable Upright ②	Eave Purlin ③	Roof Purlin ④



SHELTER STRUCTURES
TENT MANUFACTURER

Shelter Structures America Inc.

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com C: (954) 559 8759

W: www.shelterstructuresamerica.com O: (424) 254 9172



SHELTER STRUCTURES

PRODUCT GALLERY



APPLICATION

- Wedding Venue
- Annual Gala
- Show Room
- Business Conference
- Industrial Warehouse
- Lounge Space for Mining
- Sports Arena
- Hospitality

FEATURES

- Customized Entrance Canopy
- Max. Eave Height 8m
- Adjustable Span
- Roof Extension
- Numerous Sidewall Options



SHELTER STRUCTURES
TENT MANUFACTURER

Shelter Structures America Inc.

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com C: (954) 559 8759

W: www.shelterstructuresamerica.com O: (424) 254 9172