



SHELTER STRUCTURES

PRODUCT SPECIFICATIONS

SHELTER A-FRAME L-SERIES

TENT SPECIFICATIONS

Mode	L60
Span Width	60m
Eave Height	4.00m
Ridge Height	13.99M
Bay Distance	5m
Roof Pitch	18°
Longest Component	10.85M
Maximum Length	Unlimited in 5 meter increments
Max. WindLoad	185km/h (115mph)

FRAMEWORK

Main Profiles	120*400*7mm (4 channel) 120*420*7mm(4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

COVER


Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanised Steel

L-SERIES DRAWING


Rendering

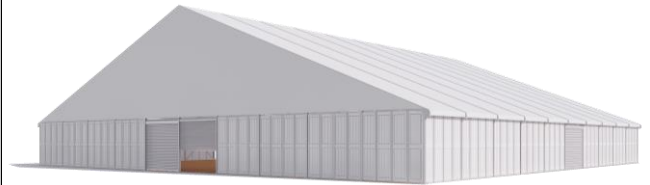


Gable Drawing

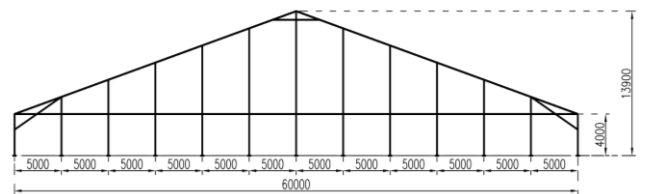

Frame Drawing

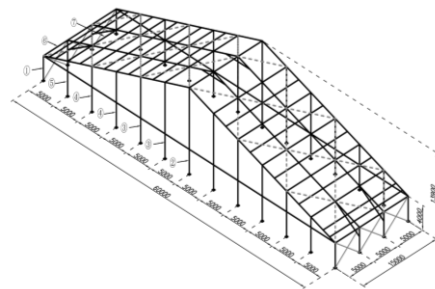

Profile Specifications

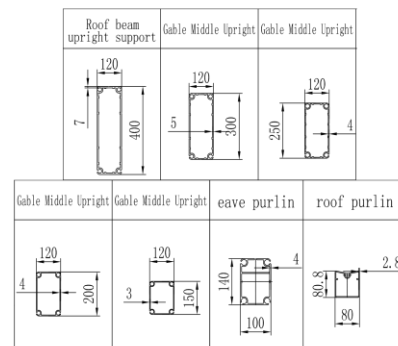

SHELTER STRUCTURES
TENT MANUFACTURER

Headquarter & Production

Chaotian Industrial Park, Panyu, Guangzhou, China.

E: admin@shelter-structures.com

M: +1 713-386-9281

W: www.shelter-structures.com

T: +8620 6660 3258